

TECHNICAL DATA

Fluke 377 FC, 378 FC Non-Contact Voltage True-rms AC/DC Clamp Meters with iFlex



MEASURE VOLTAGE AND CURRENT

With your clamp jaw

FASTER, SAFER TESTING

All without touching a live wire - using FieldSense™ technology

POWER QUALITY INDICATOR

Shows whether equipment or power line is faulty

COMPLETE 3-PHASE VOLTAGE AND CURRENT TESTS

in 3 quick steps



Voltage and current measurements with FieldSense™ technology

The Fluke 377 FC and 378 FC true-rms clamp meters use FieldSense™ technology to make testing faster and safer, all without touching a live conductor. You get accurate voltage and current measurements through the clamp jaw. Simply clip the black test lead to any electrical ground, put the clamp jaw around the conductor and see reliable, accurate voltage and current values on the display.

Power quality indicator shows whether a problem is in the equipment or the power line (378 FC only)

The 378 FC clamp meter includes a unique PQ function that senses power quality issues automatically. When making FieldSense measurements, the 378 FC will detect and display power quality issues, relating to current, voltage, power factor or any combination of the three. Now you can quickly determine if an upstream supply problem exists, or if there is a downstream equipment problem.



The 378 FC includes a power quality test that provides quick indication of whether an incoming power problem or an equipment problem exists.

Voltage and current measurements with FieldSense™ technology

No more hand-written notes or complicated math.

- Complete 3-phase voltage and current tests in 3 easy steps
- Full set of phase-to-ground and phase-to-phase values calculated
- Displayed on your smart phone and saved to the cloud via Fluke Connect software
- Phase rotation calculated and shown on the Fluke Connect software

Measure extremely high current with iFlex™ probe

Use the included iFlex flexible current probe to measure ac current as high as 2500 A. The iFlex probe provides access to large conductors in tight spaces.

Easy to see, easy to use with included tools

Your job will get easier when you use the 377FC and 378 FC clamp meter:


- The display turns green when a stable FieldSense measurement is detected.
- Visual Continuity provides a bright green screen for easy detection of continuity in noisy work areas.
- The TPAK magnetic hanging kit, with 9 inch (23 cm) hanging strap, lets you hang your clamp wherever you need: to a steel cabinet door; around a pipe; on a nail or screw head.
- The included carrying case holds the clamp, iFlex probe, test leads and the included black grounding clip.

Record, analyze, share results with Fluke Connect™ software


With Fluke Connect software you can remotely log, trend and monitor measurements to pinpoint intermittent faults. Fluke Connect also allows you to gather data as the basis for a preventive maintenance program.



Fluke Connect allows measurements to be sent to a smartphone for logging, collaboration and analysis.

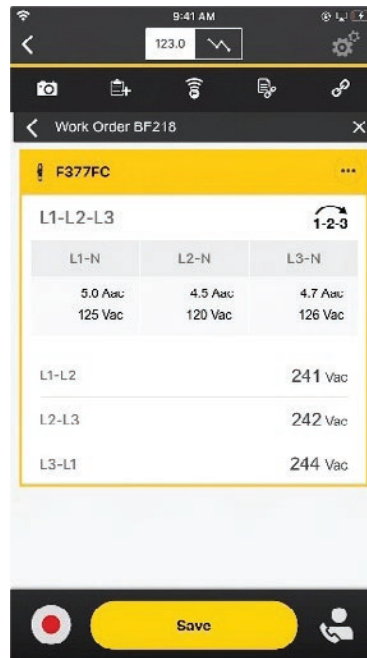


Fluke Connect pulls all data related to three-phase measurements including phase rotation and presents the full set of data for analysis at a glance.

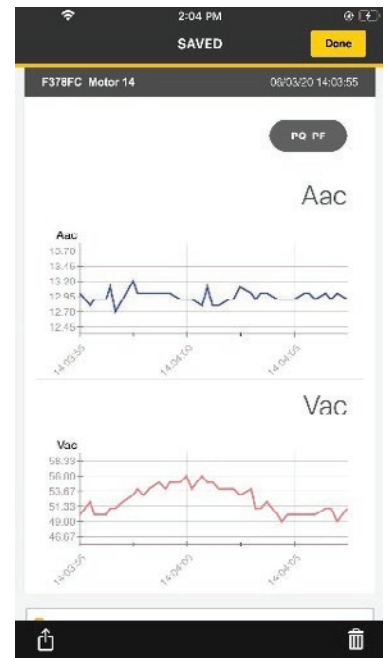

Data gathered by Fluke Connect can pinpoint elusive intermittent faults. Data collected over regular intervals can be used to spot small changes before they grow into major problems.

Specifications


| General specifications | |
|---|---|
| General Maximum voltage (between any terminal and earth ground) | 1000 V |
| Battery | |
| Type | 2 AA IEC LR6 alkaline |
| Life | 200 hours |
| Display | Dual readout |
| Automatic Power Off | 20 minutes |
| AC Current: Jaw | |
| Range | 999.9 A |
| Resolution | 0.1 A |
| Accuracy | 2 % ± 5 digits (10 Hz to 100 Hz) 2.5 % ± 5 digits (100 Hz to 500 Hz) |
| Crest Factor (50/60 Hz) | 3 @ 500 A 2.5 @ 600 A 1.42 @ 1000 A Add 2 % for C.F. >2 |
| AC Current: Flexible Current Probe | |
| Range | 2500 A |
| Resolution | 1 A (≤ 2500 A) 0.1 A (≤ 999.9 A) |
| Accuracy | 3 % ± 5 digits (5 Hz to 500 Hz) |

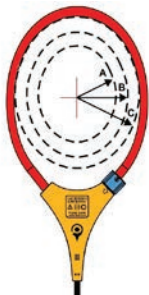

| Distance from Optimum | i2500-10 Flex | i2500-18 Flex | Error |
|-----------------------|------------------|------------------|---------|
| A | 0.5 in (12.7 mm) | 1.4 in (35.6 mm) | ± 0.5 % |
| B | 0.8 in (20.3 mm) | 2.0 in (50.8 mm) | ± 1.0 % |
| C | 1.4 in (35.6 mm) | 2.5 in (63.5 mm) | ± 2.0 % |

Measurement uncertainty assumes centralized primary conductor at optimum position, no external electrical or magnetic field, and within operating temperature range.

| | |
|-------------------------------|---------------------------------|
| DC Current | |
| Range | 999.9 A |
| Resolution | 0.1 A |
| Accuracy | 2 % ± 5 digits |
| AC Voltage: FieldSense | |
| Range | 1000 V |
| Resolution | 1 V (≤ 1000 V) |
| Accuracy | |
| ≤ 4/0 AWG | 3 % ± 5 digits (45 Hz to 66 Hz) |
| ≥ 4/0 AWG | 5 % ± 5 digits (45 Hz to 66 Hz) |

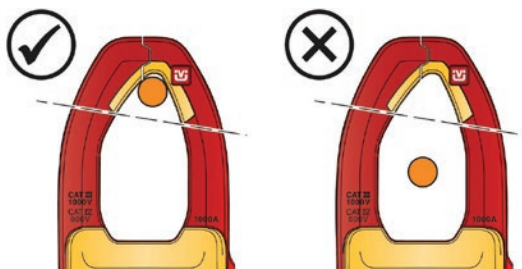

Position wire as close as possible to jaw opening (see illustration).

Specifications (continued)

| | |
|---|--|
| AC Voltage: Test Leads | |
| Range | 600.0 V 1000 V |
| Resolution | 0.1 V (≤ 600.0 V) 1 V (≤ 1000 V) |
| Accuracy | 1 % ± 5 digits (20 Hz to 500 Hz) |
| DC Voltage | |
| Range | 600.0 V 1000 V |
| Resolution | 0.1 V ≤ 600.0 V) 1 V (≤ 1000 V) |
| Accuracy | 1 % ± 5 digits |
| mV dc | |
| Range | 500.0 mV |
| Resolution | 0.1 mV |
| Accuracy | 1 % ± 5 digits |
| Amps Frequency: Jaw | |
| Range | 5.0 Hz to 500.0 Hz |
| Resolution | 0.1 Hz |
| Accuracy | 0.5 % ± 5 digits |
| Trigger Level | 5 Hz to 10 Hz, ≥ 10 A 10 Hz to 100 Hz, ≥ 5 A 100 Hz to 500 Hz, ≥ 10 A |
| Amps Frequency: Flexible Current Probe | |
| Range | 5.0 Hz to 500.0 Hz |
| Resolution | 0.1 Hz |
| Accuracy | 0.5 % ± 5 digits |
| Trigger Level | 5 Hz to 20 Hz, ≥ 25 A 20 Hz to 100 Hz, ≥ 20 A 100 Hz to 500 Hz, ≥ 25 A |
| Resistance | |
| Range | 60.00 k Ω 6000 Ω 600.0 Ω |
| Resolution | 0.1 Ω (≤ 600.0 Ω) 1 Ω (≤ 6000 Ω) 10 Ω (≤ 60.00 k Ω) |
| Accuracy | 1 % ± 5 digits |
| Capacitance | |
| Range | 1000 μ F |
| Resolution | 0.1 μ F (≤ 100.0 μ F) 1 F (≤ 1000 μ F) |
| Accuracy | 1 % ± 4 digits |
| Mechanical | |
| Size (L x W x H) | 274 mm x 86 mm x 47 mm |
| Weight (with Batteries) | 463 g |
| Jaw Opening | 34 mm |
| Flexible Current Probe Diameter | 7.5 mm |
| Flexible Current Probe Cable Length (head to electronics connector) | 1.8 m |
| Rogowski Coil Length | 450 mm |

| Environmental | |
|--|---|
| Operating Temperature | -10 °C to 50 °C |
| Storage Temperature | -40 °C to 60 °C |
| Operating Humidity (without condensation) | Non condensing (<10 °C) ≤ 90 % RH (10 °C to 30 °C) ≤ 75 % RH (30 °C to 40 °C) ≤ 45 % RH (40 °C to 50 °C) |
| Temperature Coefficients | Add 0.1 x specified accuracy for each degree C >28 °C or <18 °C |
| Ingress Protection | IEC 60529: IP30 (jaw closed) |
| Operating Altitude | 2000 m |
| Storage Altitude | 12 000 m |
| Electromagnetic Compatibility (EMC) | |
| International | IEC 61326-1: Portable Electromagnetic Environment IEC 61326-2-2, CISPR 11: Group 1, Class B Group 1: Equipment has intentionally generated and/or uses conductively-coupled radio frequency energy that is necessary for the internal function of the equipment itself. Class B: Equipment is suitable for use in domestic establishments and in establishments directly connected to a low voltage power supply network which supplies buildings used for domestic purposes. Emissions that exceed the levels required by CISPR 11 can occur when the equipment is connected to a test object. |
| Korea (KCC) | Class A equipment (Industrial Broadcast & Communications Equipment) Class A: Equipment meets requirements for industrial electromagnetic wave equipment and the seller or user should take notice of it. This equipment is intended for use in business environments and not to be used in homes. |
| USA (FCC) | 47 CFR 15 subpart B. This product is considered an exempt device per clause 15.103. |
| Safety | |
| General | IEC 61010-1: Pollution degree 2 |
| Measurement | IEC 61010-2-032: CAT III 1000 V / CAT IV 600 V IEC 61010-2-033: CAT III 1000 V / CAT IV 600 V |
| Current Clamp for Leakage Current Measurements | IEC 61557-13: Class 2, ≤ 30 A/m |
| Wireless Radio | |
| Radio Frequency Certification | FCC ID: T68-FBLE IC:6627A-FBLE |
| Frequency Range | 2405 MHz to 2480 MHz |
| Output Power | <100 mW |
| Radio Frequency Data | |

Ordering information

FLUKE-378 FC

Included

Fluke 378 FC Non-Contact Voltage True-rms AC/DC Clamp Meter
TL224 Test Leads
TP175 TwistGuard™ Test Probes
AC285 black grounding clip (1 only)
i2500-18 iFlex® Flexible Current Probe 18 inch (48 cm)
TPAK ToolPak™ Magnetic Meter Hanger
 Premium carrying case
 Quick reference guide

FLUKE-377 FC

Included

Fluke 377 FC Non-Contact Voltage True-rms Wireless AC/DC Clamp Meter
TL224 Test Leads
TP175 TwistGuard™ Test Probes
AC285 black grounding clip (1 only)
i2500-18 iFlex® Flexible Current Probe 18 inch (48 cm)
TPAK ToolPak™ Magnetic Meter Hanger
 Premium carrying case
 Quick reference guide



Preventive maintenance simplified. Rework eliminated.

Save time and improve the reliability of your maintenance data by wirelessly syncing measurements using the Fluke Connect system.

- Eliminate data-entry errors by saving measurements directly from the tool and associating them with the work order, report or asset record.
- Maximize uptime and make confident maintenance decisions with data you can trust and trace.
- Move away from clipboards, notebooks and multiple spreadsheets with a wireless one-step measurement transfer.
- Access baseline, historical and current measurements by asset.
- Share your measurement data using ShareLive™ video calls and emails.
- The Fluke 377 FC and Fluke 378 FC clamp meters are part of a growing system of connected test tools and equipment maintenance software. Visit the Fluke website to learn more about the Fluke Connect system.



All trademarks are the property of their respective owners. WiFi or cellular service required to share data. Smartphone, wireless service and data plan not included with purchase. First 5GB of storage is free.

Smartphone wireless service and data plan not included with purchase. Fluke Connect is not available in all countries.

Fluke. *Keeping your world up and running.®*

Modification of this document is not permitted without written permission from Fluke Corporation.

©2020 Fluke Corporation. Specifications subject to change without notice. 3/2020 6013559a-en