

**Quick Change D’VersiBIT® System Kit**



- All the same great features as a traditional flexible drill bit, but with even more flexibility and versatility
- Simplifies the frustrating and time-consuming process of installing wire or cable inside existing walls
- For use when drilling between studs and joists
- Can use with any type of bit with a ¼” quick change hex on it, such as spade bits, auger bits or drill bits for increased application flexibility.
- Replace only the bit as it wears rather than the entire bit and shaft for lower overall cost of ownership
- Quickly and easily switch from drilling to pulling with the quick change pulling grip

**SPECIFICATIONS**

	Dimensions	Weight
<b>941</b>	1.2 x 8.5 x 40.7” (30.5 x 215.9 x 1033.8mm)	1.67 lbs (.76kg)
<b>941-18</b>	.85 x 2.75 x 21.75” (21.6 x 69.9 x 5552.4mm)	0.6 lbs (.27kg)
<b>941-36</b>	.85 x 2.75 x 39.75” (21.6 x 69.9 x 1009.6mm)	0.73 lbs (.33kg)
<b>60A-3/4</b>	1.25 x 3.75 x 8.25” (31.7 x 95.2 x 209.5mm)	0.34 lbs (.15kg)
<b>125Q</b>	9.3 x 3.6 x 1.2” (236 x 91x 30.5mm)	0.04 lbs (.02kg)
<b>150Q</b>	1 x 3.25 x 12” (25.4 x 82.5 x 304.8mm)	0.12 lbs (.05kg)
<b>168Q</b>	12 X 3.6 X 1.2” (304 x 91 x 30.5mm)	0.06 lbs (.03kg)
<b>712P</b>	.8 x 8 x 9.8” (20.3 x 203.2 x 248.9mm)	0.43 lbs (.19kg)
<b>921</b>	.5 x 5 x 39.25” (12.7 x 127 x 996.9mm)	1.15 lbs (.52kg)
<b>921-18</b>	2.25 x 5 x 21.5” (57.1 x 127 x 539.7mm)	0.68 lbs (.31kg)
<b>921-36</b>	2.25 x 5 x 39.5” (57.1 x 127 x 1003.3mm)	0.74 lbs (.33kg)
<b>60A-5/8</b>	1.25 x 3.75 x 8.25” (31.7 x 95.2 x 209.5mm)	0.31 lbs (.14kg)
<b>60A-7/8</b>	1.28 x 3.75 x 8.25” (32.5 x 95.2 x 209.5mm)	0.36 lbs (.16kg)
<b>60A-1</b>	1.3 x 3.75 x 8.25” (33 x 95.2 x 209.5mm)	0.38 lbs (.17kg)

CAT. NO.	UPC NO.	DESCRIPTION
941	31388	D’Versibit, Quick Change, Starter Kit
941-18	31390	D’Versibit, Extension 1/4 x 18 (POP)
941-36	31389	D’Versibit, Extension 1/4 x 36 (POP)
60A-3/4	12417	Bit, Auger, Quick Change 3/4A (POP)
125Q	12791	Grip, Quick Change 3/8 x 1/4 (POP)
150Q	12792	Grip, Quick Change 1/2 x 1/4 (POP)
168Q	12793	Grip, Quick Change 3/4 x 1/4 (POP)
712P	38350	Tool, Placement (Pkg’d - All Bits)
921	12411	Quick Change Extension System Kit (POP)
921-18	12413	Extension, Quick Change 3/16 x 18 (POP)
921-36	12415	Extension, Quick Change 3/16 x 36 (POP)
60A-5/8	12416	Bit, Auger, Quick Change 60A - 5/8 (POP)
60A-7/8	12418	Bit, Auger, Quick Change 60A - 7/8 (POP)
60A-1	10538	Bit, Auger, Quick Change (1A) (POP)

## D'VersiBIT® Starter Kit



DBITKIT

- All the tools to complete a typical wiring job
- Includes 09-03-54B bit, 712P placement tool and 150 pulling grip

CAT. NO.	UPC NO.	DESCRIPTION
DBITKIT	01630	D'VersiBIT® Kit with 9/16" Bit, Placement Tool and Grip for Pulling 1/2" OD Wire

## Extensions



38686

- Sizes for 3/16" (4.8 mm) and 1/4" (6.4 mm) diameter shafts
- Connect to chuck end of D'VersiBIT® shaft to increase the length of the bit


CAT. NO.	UPC NO.	USE WITH	
		SHAFT DIA.	LENGTH
3XT 54	38686	3/16" (4.8 mm)	54" (1371.6 mm)
4XT 54	38689	1/4" (6.4 mm)	54" (1371.6 mm)

### SPECIFICATIONS

**Size** 3XT 54- connecting end diameter 7/16" (11.1 mm)  
4XT 54 - connecting end diameter 5/8" (15.9 mm)

CAT. NO.	UPC NO.	DESCRIPTION
<b>R</b> 54333	54333	Screws for 3XT
<b>R</b> 50753	50753	Screws for 4XT

## Placement Tool

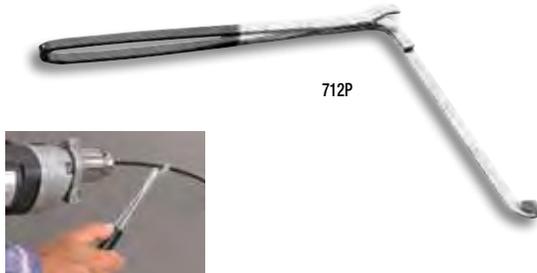

712P

- Allows placement of the drill bit at any point within the wall
- Helpful in judging where the bit will be during drilling to avoid accidentally drilling through the wall
- Useful for vertical and horizontal placements

### SPECIFICATIONS

**Function** Use to position all bit and shaft sizes.

CAT. NO.	UPC NO.	DESCRIPTION
712P	38350	D'VersiBIT® Placement Tool

## Wire and Cable Pulling Grips



168Q

150Q

125Q

- Grip can attach to standard D'Versibit® or to any standard 1/4" Quick Connect adapter
- Swivel design reduces twisting
- Mesh design holds wire or cable during pull
- Capacity: 100 lbs. pulling force

### SPECIFICATIONS

**Function** For pulling wire, cable or fish tape through walls.  
**Pulling Strength** 100 lbs.

CAT. NO.	UPC NO.	DESCRIPTION
125Q	12791	Quick Change Grip for Pulling Single Wire with 3/8" to 1/2" (9.5 mm to 12.7 mm).
150Q	12792	Quick Change Grip for Pulling 1/2" (12.7 mm) OD Wire with 1/2" to 9/16" (12.7 to 14.3 mm).
168Q	12793	Quick Change Grip for Pulling 3/4" (19.1 mm) OD Wire with 3/4" to 1" (19.1 to 25.4 mm).

