

PD9502

4-20 mA / 0-10 VDC Low-Cost Signal Generator



FEATURES

- 0-20 / 4-20 mA or 0-10 / 2-10 VDC Ranges
- Low-Cost
- Simple to Use
- Compact Size
- 4-Digit LED Display
- One-Turn Adjustment Knob
- +/- 0.5% +/- 1 Count Accuracy
- Power 15-27 VDC or USB Power Bank

OVERVIEW

The PD9502 is a low-cost, compact, simple to use 4-20 mA or 0-10 VDC signal generator. It can easily be set for 0-20 mA, 4-20 mA, 0-10 V or 2-10 V ranges. Signal adjustment is made with a one-turn knob. A 15-27 VDC wall plug is provided with the instrument. Optional USB power bank is available.

PRECISION DIGITAL CORPORATION


PRECISION
DIGITAL

Find Quality Products Online at: www.GlobalTestSupply.com

sales@GlobalTestSupply.com

PD9502 4-20 mA / 0-10 VDC Low-Cost Signal Generator

PHYSICAL FEATURES

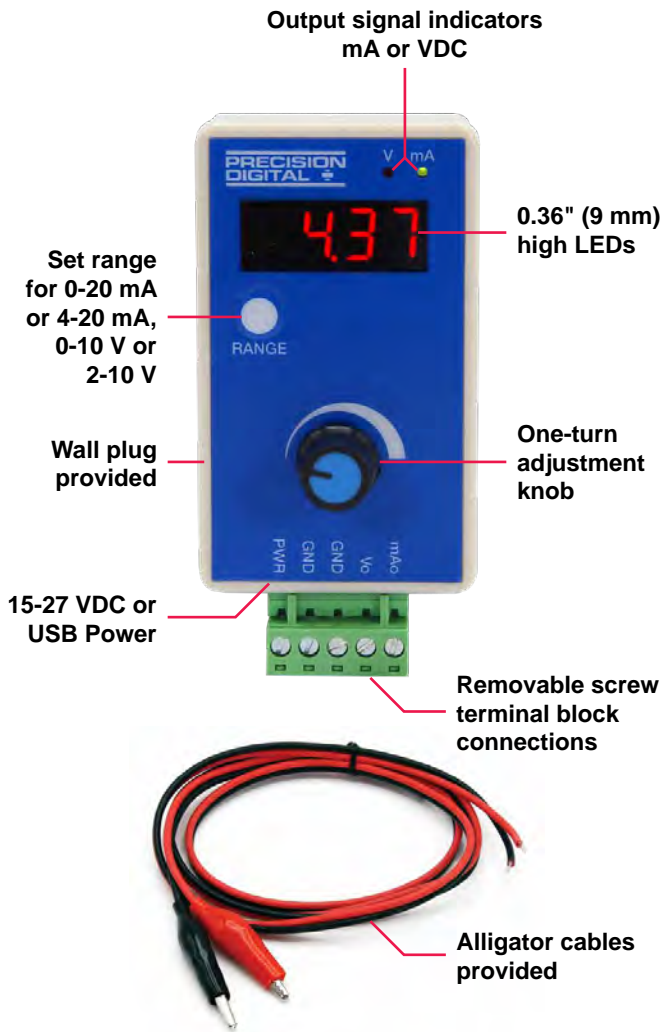


OPERATION

The output of the signal generator is determined by the light under V or mA on the face of the instrument:

V or mA Light	Light Color	Action	Output
V	Red	Flashing	2-10 VDC
V	Red	Steady	0-10 VDC
mA	Green	Flashing	4-20 mA
mA	Green	Steady	0-20 mA

1. Connect the signal generator for desired output
2. Set Output using the Range button on face of the instrument
3. Adjust one-turn knob to desired output

PDA1001 USB POWER BANK

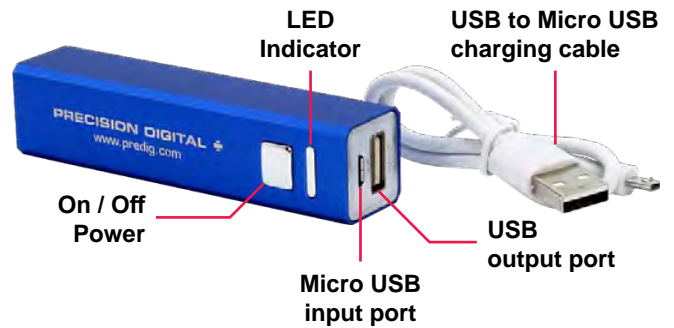

Overview

The PDA1001 is a portable USB power bank that can conveniently provide power to the PD9502 signal generator. The internal UL Listed 1,800 mAh lithium-ion Grade A battery can power up the PD9502 for over 6 hours. The PDA1001 includes a USB to Micro USB cable which can be used to recharge the power bank or power up the PD9502.

PDA1001 Powering up a PD9502 Signal Generator



Specifications

Input Power: 5 VDC / 1000 mA

Output Power: 5 VDC / 1000 mA

Battery Capacity: 6.66 Wh, 3.7 VDC / 1800 mAh

Output Capacity: 5.5 Wh, 5 VDC / 1100 mAh

Typical Power Life for Using with PD9502: +6 hours

LED indicator: Flashing red light while charging the power bank. Blue light while powering up devices.

Material: Aluminum


Dimensions: 0.83" x 0.83" x 3.7" (21 mm x 21 mm x 94 mm) (W x H x L)

Cable: USB 2.0 Type A Male to Micro USB Type B Male cable included (For charging and powering); 11.8" (30 cm) long.

Weight: 2.4 oz (68 g)


Dimensions

Units: Inches (mm)

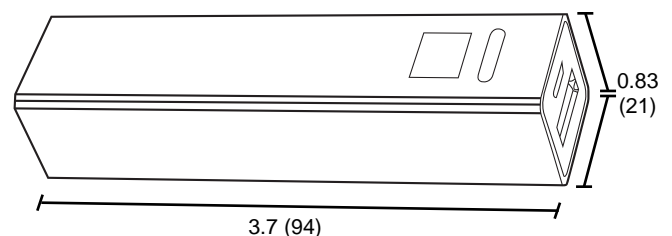


PD9502 4-20 mA / 0-10 VDC Low-Cost Signal Generator

CONNECTIONS

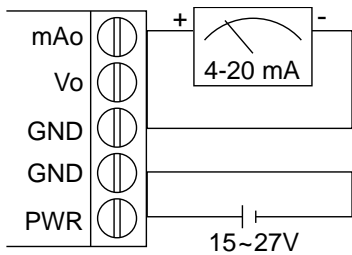


0-20 mA / 4-20 mA Output

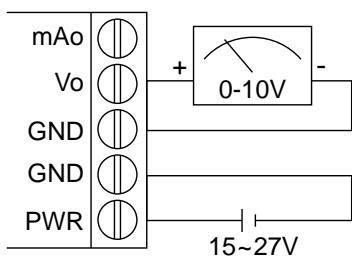

0-10V / 2-10V Output

DIMENSIONS

Units: Inches (mm)

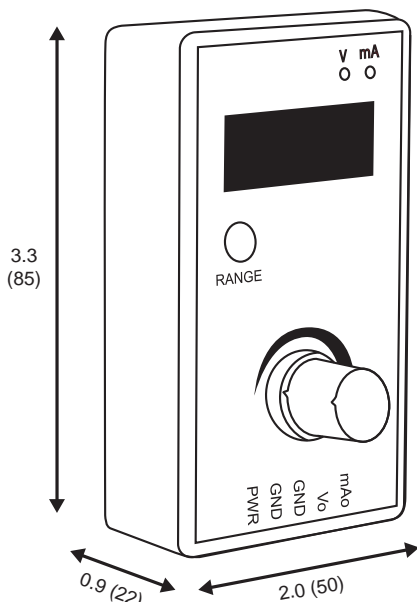

WARNING
Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SPECIFICATIONS

Display: 0.36" (9 mm) high red LED

Accuracy: +/- 0.5% +/- 1 count

Operating Temperature Range: -4 to 140°F (-20 to 60°C)

Connections: Removable screw terminal block

Output Ranges: 0-20 mA, 4-20 mA, 0-10 VDC, 2-10 VDC

Power Requirement: 15-27 VDC (wall plug provided)

Loop Voltage: When powered by USB: 13.5V,
When powered by DC supply: 2 VDC less than the supply output

Output Load Impedance Requirements:

Voltage-type $\geq 2K\Omega$, current-type $\leq 500\Omega$

Overall Dimensions: 2.0" x 3.3" x 0.9"
(W x H x D) (85 mm x 50 mm x 22 mm)

Weight: 2.1 oz (60 g)

ORDERING INFORMATION

Model	Description
PD9502	4-20 mA / 0-10 VDC Low-Cost, Compact, Signal Generator with Wall Plug

Accessories

Model	Description
PDA1001	USB Power Bank

Your Local Distributor is:

Disclaimer

The information contained in this document is subject to change without notice. Precision Digital Corporation makes no representations or warranties with respect to the contents hereof, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose.

©2019 Precision Digital Corporation. All rights reserved.

LIM9502_B 04/19



PRECISION DIGITAL CORPORATION

Find Quality Products Online at:

www.GlobalTestSupply.com

sales@GlobalTestSupply.com